


**12V160A-30H-CTRL200 Deep Cycle+Engine Start Lithium Battery**  
**Battery Specification**



**12V160A-30H-CTRL200**

Attribute		Value
Nominal True Capacity	160	Amp Hours
Charging Voltage	14.0 to 14.4	Volts
Nominal Voltage	12.8	Volts
Cut-off Discharge Voltage	11.8	Volts
Max Discharge Current (Continuous)	200	Amps
Max Discharge Current (1sec pulse)	1600	Amps
Max Continuous Charge Current	80	Amps
Internal Impedance	< 8	Milliohms
Cycle Life @ 80% Depth of Discharge	2000-3000	
Dimensions (L x W x H)	14.9 x 8.0 x 11.8	Inches
Weight	50	Pounds
Safety Leader U.N. International Approved	U.N. D.O.T. 38.3	Lithium
Charge Temperature	32 to 113	Fahrenheit
Discharge Temperature	-4 to 140	Fahrenheit
Storage Period (1 month)	-4 to 113	Fahrenheit
Storage Period (6 month)	-4 to 77	Fahrenheit
Battery Terminals (Max Torque 100in-lbs)	5/16" or 3/8"	Brass Bolt
Lithionics NeverDie Feature	YES	
Active Shunt Cell Balancing	YES	
Wireless NeverDie Remote	YES	Optional

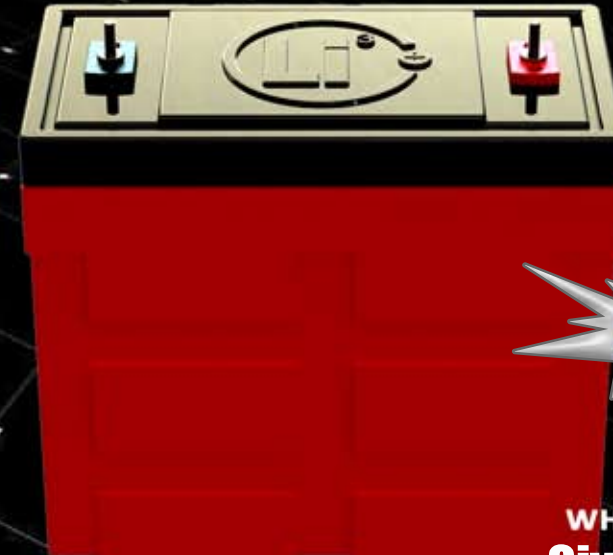


**WHY CHOOSE, JUST  
Give me the ION!**

NOTE: Contact Lithionics Battery for a user installation Guide. Follow the guide to ensure fitness of use and warranty.

**NeverDie Features**

**NeverDie Features**

- Reserve Capacity (Low Voltage Cutoff @ 11.8V)
- Pushbutton Storage Option
- Active Shunt Cell Balancing
- Individual Cell Monitoring (Temp & Voltage)
- Charge Enable (12.5V)
- Overtemp Protection (Enabled @ 140F/60C)
- Over-Discharge Protection (Dead Voltage Lockout @ 10V)
- Short Circuit Protection

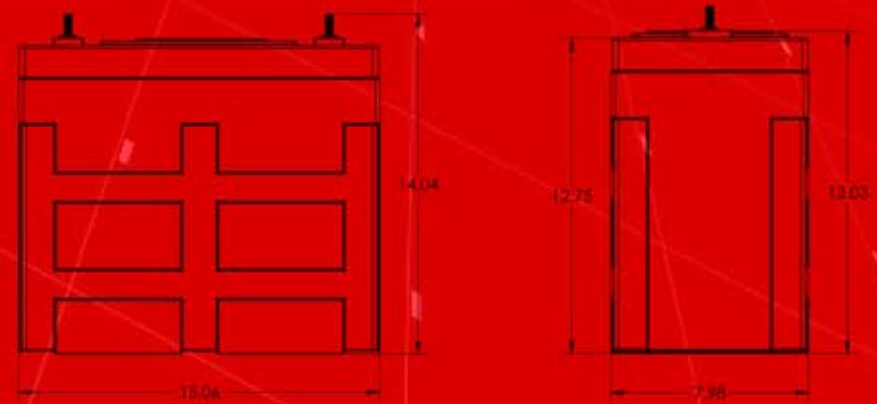

PROPRIETARY AND CONFIDENTIAL. THE INFORMATION IN THIS DRAWING IS THE SOLE PROPERTY OF LITHIONICS. ANY REPRODUCTION IN PART OR WHOLE WITHOUT WRITTEN PERMISSION FROM LITHIONICS IS PROHIBITED.

**Main Office: 855-726-4204**  
**or send an email to [info@lithionicsbattery.com](mailto:info@lithionicsbattery.com)**

[www.lithionicsbattery.com](http://www.lithionicsbattery.com)