



TM2™ Tank Monitor

The SCAD TM2 is an easy to install and cost effective solution for monitoring the liquid level in two tanks up to 30 inches tall by simply touching a pad. The TM2 is compatible with SCAD's electronic level sensors that cannot get fouled. The monitor automatically checks and alerts when liquid levels are critical and provides external alert power.

▲ SCAD TM2 FEATURES


- Monitor water, grey water or holding tank level by simply tapping a touchpad; Compatible most fuel float sensors;
- Compact surface mount size (only 1/2" hole required for wires)
- Continuous read function provides hands-free monitoring while filling or emptying tanks;
- External sensor easily sticks onto the outside of plastic and composit tanks and cannot foul (for water and waste);
- Internal electronic sensor is available for metal tanks;
- Visual alarm that is user selectable on for empty or full;
- External alarm control wire;
- Accomodates all tank shapes.

▲ SCAD TM2 BENEFITS

- Easy to install, easy to operate, reliable and cost effective solution for monitoring tank levels;
- External sensor eliminates fouling;
- Tank level can be continuously viewed while filling or emptying a tank;
- Powers external devices during alert conditions;
- Small surface mount foot print saves space;
- Can be used with a variety of sensors.


▲ SCAD TM2 SPECIFICATIONS

- **Power:** 12-24 VDC
- **Size:** 2.2 x 2.2 x 0.3 inches (56 x 56 x 7.6 mm)
- **Sensor Type:** SCAD external sensor for water and waste provided; SCAD internal sensor available for metal tanks; Monitor is compatible with 240-33 Ohm and 10-180 Ohm float sensors for fuel
- **Alarm:** Visual alarm on empty or full, or no alarm. Power wire that provides 1 Amp at battery voltage can be set to energize on alarm condition.

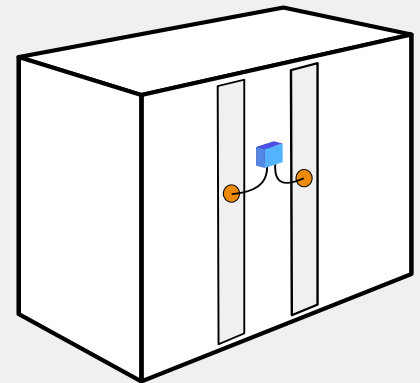

Easy Stick-On Sensor

(sold separately)

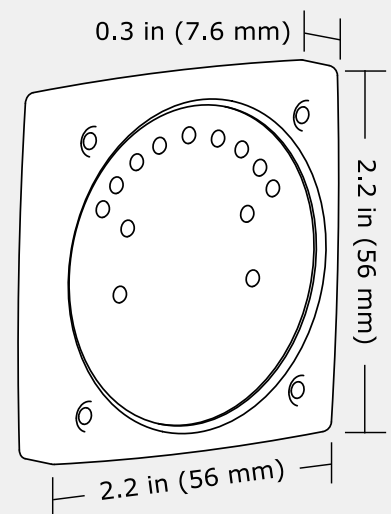

Compact Surface Mount