

# SLP150-12 (CLASS 1 DIVISION 2)

## High Efficiency Multicrystalline PV Module



Certified to UL1703 and cUL1703  
Certified for Hazardous Environments  
C1D2 - Class 1, Division 2




Electrical Characteristics	SLP150-12
Product code	150011232
Maximum power (Pmax)	150W
Voltage at Pmax (Vmp)	18.5V
Current at Pmax (Imp)	8.11A
Open-circuit voltage (Voc)	22.2V
Short-circuit current (Isc)	8.68A
Temperature coefficient of Voc	-(80±10)mV/°C
Temperature coefficient of Isc	(0.065±0.015)%/°C
Temperature coefficient of power	-(0.5±0.05)%/°C
NOCT (Air 20°C; Sun 0.8kW/m² wind 1m/s)	47±2°C
Operating temperature	-40°C to 85°C
Maximum system voltage	600V DC
Power tolerance	± 5%

\*STC: Irradiance 1000W/m², AM1.5 spectrum, module temperature 25°C

\*NOCT: Nominal operating cell temperature (the data is only for reference)


### Module Diagram

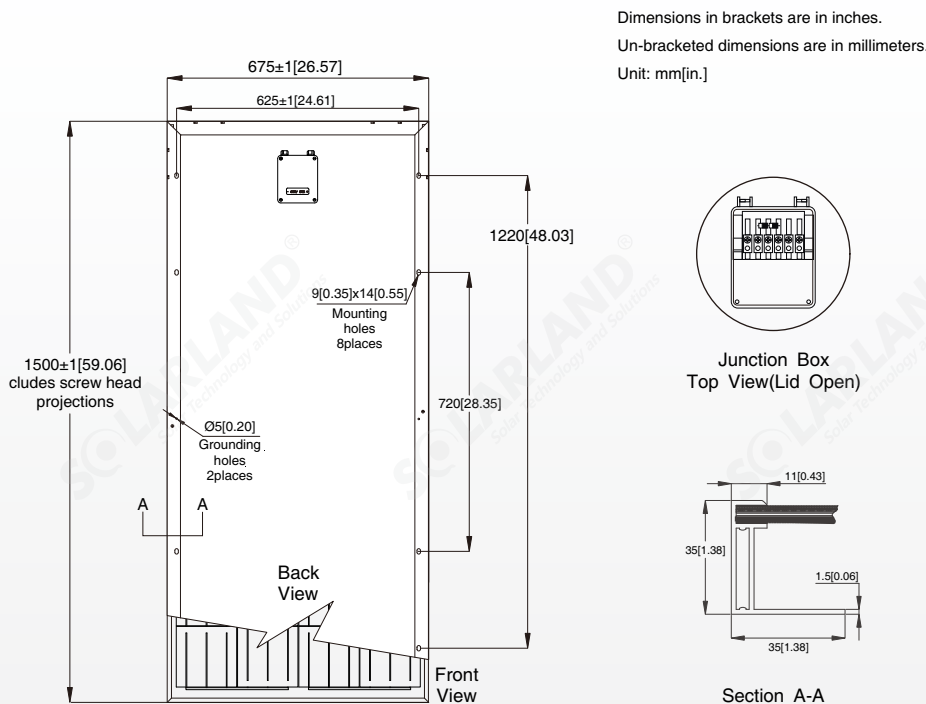

### Features

- Nominal 12V DC for standard output.
- Outstanding low-light performance.
- Heavy-duty anodized frames.
- High transparent low-iron, tempered glass.
- Rugged design to withstand high wind pressure, hail and snow load.
- Aesthetic appearance.

### Characteristics

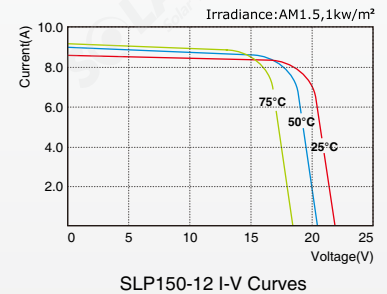

Specifications	SLP150-12
Cells	Polycrystalline silicon solar cell
No. of cells and connections	36(4X9)
Module dimension	1500mm[59.06in.].x675mm[26.57in.].x35mm[1.38in.]
Weight	12.1kg[26.68lbs]
Packing information(Carton)	1545mm[60.83in.].x720mm[28.35in.].x105mm[4.13in.]/(2pcs/carton)

\*Limited warranty: 5-year limited warranty of materials and workmanship; 10-year limited warranty of 90% power output; 25-year limited warranty of 80% power output. For detail, please contact us.

\*Specifications are subject to change without notice at any time.